


Model number structure

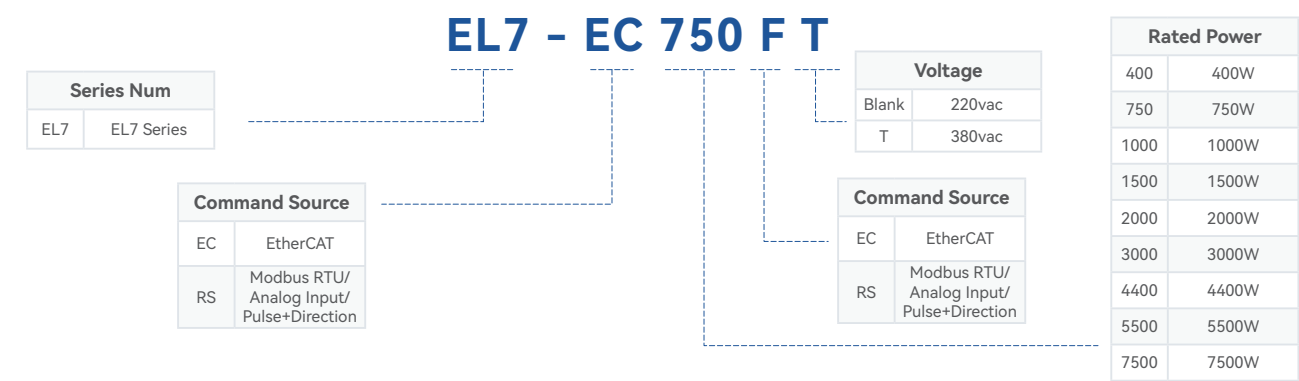

Specifications

1-phase / 3-phase 200-240VAC, 50/60Hz

Models	Rated power (W)	Rated current (Arms)	Peak current (Arms)	Dimensions (mm)
EL7-EC400F	400	3.5	9.5	40*175*156
EL7-EC750F	750	5.5	16.6	
EL7-EC1000F	1000	7.0	18.7	
EL7-EC1500F	1500	9.5	31.1	80*175*179
EL7-EC2000F	2000	12	36	

3-phase 380-440VAC, 50/60Hz

Models	Rated power (W)	Rated current (Arms)	Peak current (Arms)	Dimensions (mm)
EL7-EC750FT	750	2.7	8.6	55*175*179
EL7-EC1000FT	1000	3.5	10.6	
EL7-EC1500FT	1500	5.4	14.9	
EL7-EC2000FT	2000	8.4	24.8	80*175*179
EL7-EC3000FT	3000	11.9	11.9	
EL7-EC4400FT	4400	16.5	16.5	90*250*230
EL7-EC5500FT	5500	20.8	20.8	
EL7-EC7500FT	7500	25.7	25.7	

Headquarters China Leadshine Technology Co., Ltd

+86 755 26411692 +86 755 26402718
www.leadshine.com
sales@leadshine.com (Sales)
tech@leadshine.com (Technical Support)
15-20/F, Block B, Nanshan i-Valley, Shuguang Community, Xili Town, Nanshan District, Shenzhen 518055, China

North America Office Leadshine America, Inc.

1-949-608-7270 1-949-638-7298
www.leadshineusa.com
sales@leadshineusa.com (Sales)
support@leadshineusa.com (Technical Support)
26050 Towne Centre Dr.Foothill Ranch, CA 92610 USA

in y t f t @Leadshine

D230419



Stock Code: 002979



EL7-EC Series General Purpose EtherCAT AC Servo Drives

Product Introduction

EL7 – EC Series



EL7-EC Series AC servo products are high performance AC digital servo which is designed for position/velocity/torque high accurate control with power rating ranging up to 2kW for 220VAC models and 7.5kW for 380VAC models which provides a perfect solution for different applications with easy tuning process.



Applications





Ports & Connectors

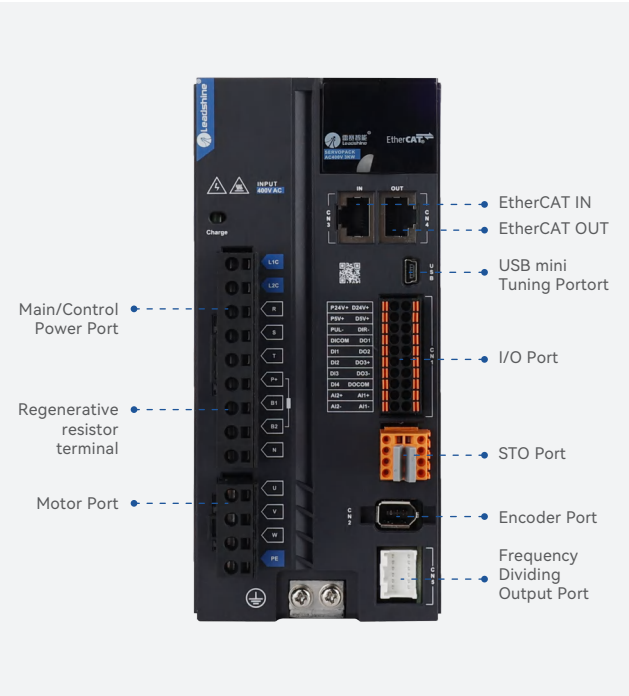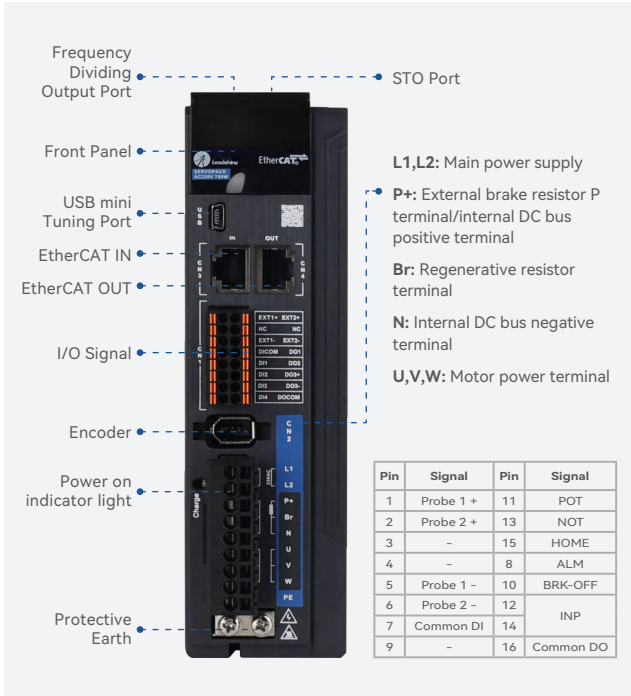

Servo drive features



Drive performances

- Frequency response (kHz)
Quicker system response of 3.2kHz for higher precision control.
- Communication cycles
Communication cycle time as short as 125µs for better position control

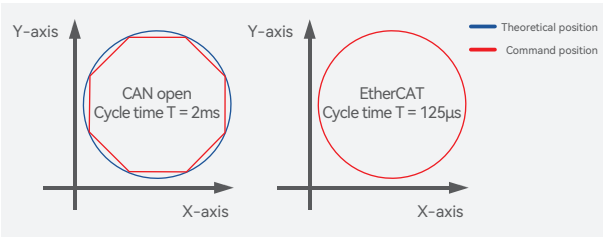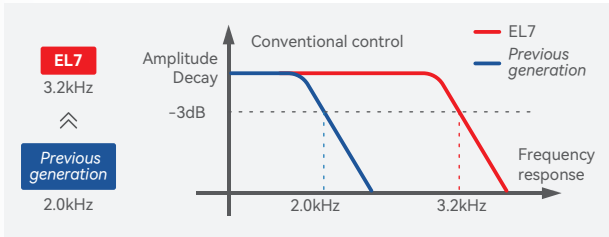


Functionalities

- Zero tracking control
Able to realize a zero position deviation during acceleration/deceleration by improving multi-axis precision and following.

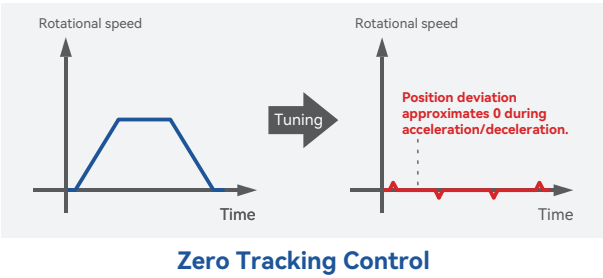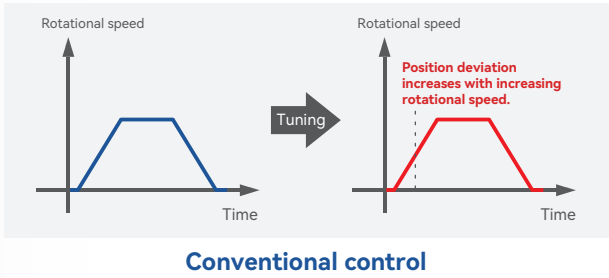


- Servo motor
Better reliability with IP ratings of IP67 in addition to higher max. speed/torque and overload rate up to 350%
- Safe Torque Off (STO) SIL3
Ensures that no torque-generating energy can act upon a motor at emergency stop and prevents unintentional starting.

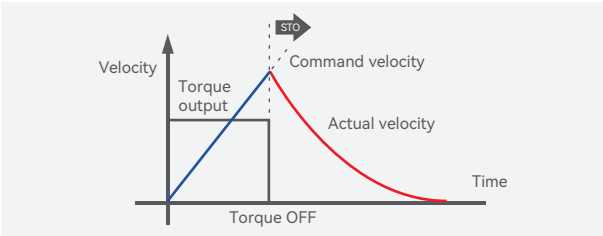

Tuning

- Easy tuning
Follow a few simple steps to get servo tuning done. Tested and proven to be easy to use and effective.

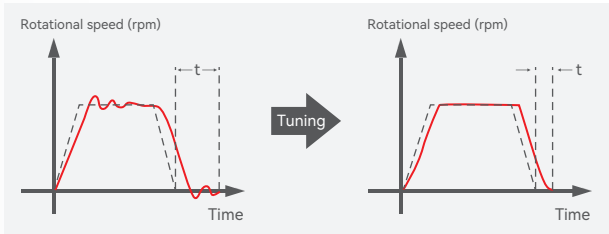

- Multiple axes tuning
EtherCAT drives can be tuned at the same time if linked in the same network through EtherCAT ports.

